



Minor customization Design-based customization

polypersia

Verified

by **Abrisham Road**
Inspection group .co
Custom manufacturer

Store rating :3

Response time ≤6h

Floorspace : 900m²

Transactions : \$10,000+

Staff : 3

Products : 2



Abrisham Road
JUST TRY NEW METHODES

3 / 5

Satisfied
2 Reviews



Company Overview

Who we Are?



Company Information

What do we do!





Categories : **Petroleum & Plastic Industry**

polypersia Products


M2/HDPE POLYETHYLENE		GM-RMD-3845-M052	
Product Description			
Part Number	GM-RMD-3845-M052		
Brand	HDPE	Polyethylene	
Application	Medium Density		
Color	Black		
Technical Data			
Property	UNIT	METHOD	VALUE
Modulus, E	1.0E+09	ASTM D 2990	1.0E+09
Strength	40.0	ASTM D 2990	40.000000
Elongation	10	ASTM D 2990	10.000000
Impact Strength at 10°C	1000	ASTM D 256	1000
Heat Deflection Temp	175	ASTM D 1525	175

High-Density Compound Polyethylene (HD...

Min. order: 1 pieces

\$900
MOQ: 1 pieces

Request for Quotation

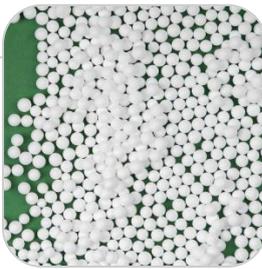

Iran Medium/High-Density Polyethylene...

Min. order: 1 pieces

MOQ: 1 pieces

Request for Quotation



Categories : **Petroleum & Plastic Industry**

High-Density Compound Polyethylene (HDPE) for Extrusion And Pipe

- High-Density Compound Polyethylene (HDPE) for Extrusion/Pipe Applications.
- Iran's HDPE is a premium material designed for water, gas, and sewage pipelines, offering exceptional durability, chemical resistance, and long-term performance.
- Produced in state-of-the-art petrochemi...

\$900
MOQ: 1 pieces

MD/HDPE POLYETHYLENE		GM-RMD-3840-M010	
<p>•Typical Application & Characteristics: GM-RMD-3840-M010 is natural polyethylene compound for rotational molding application. Suitability for use in any application should be determined by appropriate performance testing.</p>			
Product Description			
ITEM CODE	GM-RMD-3840-M010		
Grade	MD/HDPE Polyethylene		
Application	Rotational Molding		
Color	Natural		
Typical Data			
TEST ITEM	UNIT	METHOD	VALUE
MFI (190 °C- 2.16 kg)	gr/10min	ISO 1133	3.5±0.2
Density	gr/cm ³	ISO 1183	0.930 ± 0.005
Elongation	%	ASTM D-638	900
Tensile Stress at Yield	MPA	ASTM D-638	15±2
Vicat Softening Point	°c	ASTM D-1525	115
<p>Remarks</p> <ul style="list-style-type: none"> • Package: Plastic Bags 25 ± 0.1 Kg • Storage: in manner to prevent of a direct exposure of sunlight or heat the storage area should be dry and preferably don't exceed 50 °C.GMY Co.do not give warranty to bad storage conditions lead to quality deterioration and inadequate product performance. • Typical values: not to be construed as specification limits. • Technical Disclaimer: The values reported in this technical data sheet are the results of tests carried out in accordance with standard test procedures in a laboratory environment. Actual properties may vary depending on batch and extrusion conditions. Therefore, these values should not be used for specification purposes. 			

Request for Quotation

Min.Q	Max.Q	Price

 [Contact supplier](#)

 [Chat With supplier](#)






Categories : **Petroleum & Plastic Industry**

Iran Medium/High-Density Polyethylene (HDPE)

- Iran's Medium/High-Density Polyethylene (HDPE) compounds for rotational molding are renowned for their durability, thermal stability, and chemical resistance.
- These compounds ensure uniform wall thickness, making them ideal for products like water tanks, fuel containers, and outdoor...

MOQ: 1 pieces

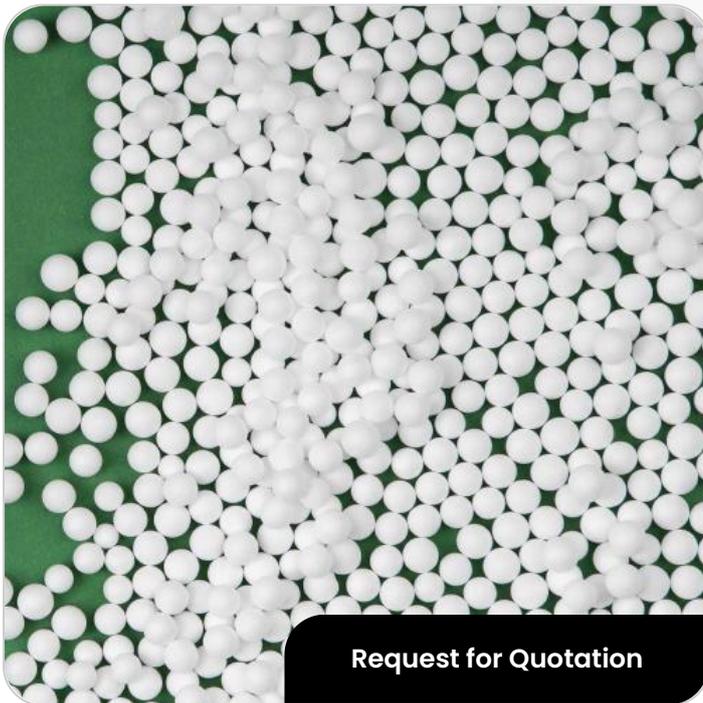

[Request for Quotation](#)



Min.Q

Max.Q

Price



Contact supplier



Chat With supplier

